


# Handline Nozzle

## Unique Features

1. 316 stainless steel spinning teeth ensure corrosion resistance and durability
2. Suitable for high pressure operation up to 580 PSI (40 bar)
3. Laser etched anodized indicating bands for long life and easy use. (No stick labels to fade or come loose)
4. Larger metal flow select ring (Easy to change flow settings even with a wet glove)
5. New improved handle with two reinforced metal pieces on each side to ensure breakage free
6. Stainless steel inlet screen catches solid before they enter nozzle (only things that gets through can be flushed without shutting down)
7. Heavy duty chrome plated metal shutoff balls ensures a smooth action and long dependable service life
8. Ergonomic shaped pistol grip for comfort. Pistol grip standard on all models. (Also available in various colors)
9. Each nozzle etched with a unique series number. Aids identification, tracks manufacturing date and warranty
10. Flow pattern détentes gives positive positioning



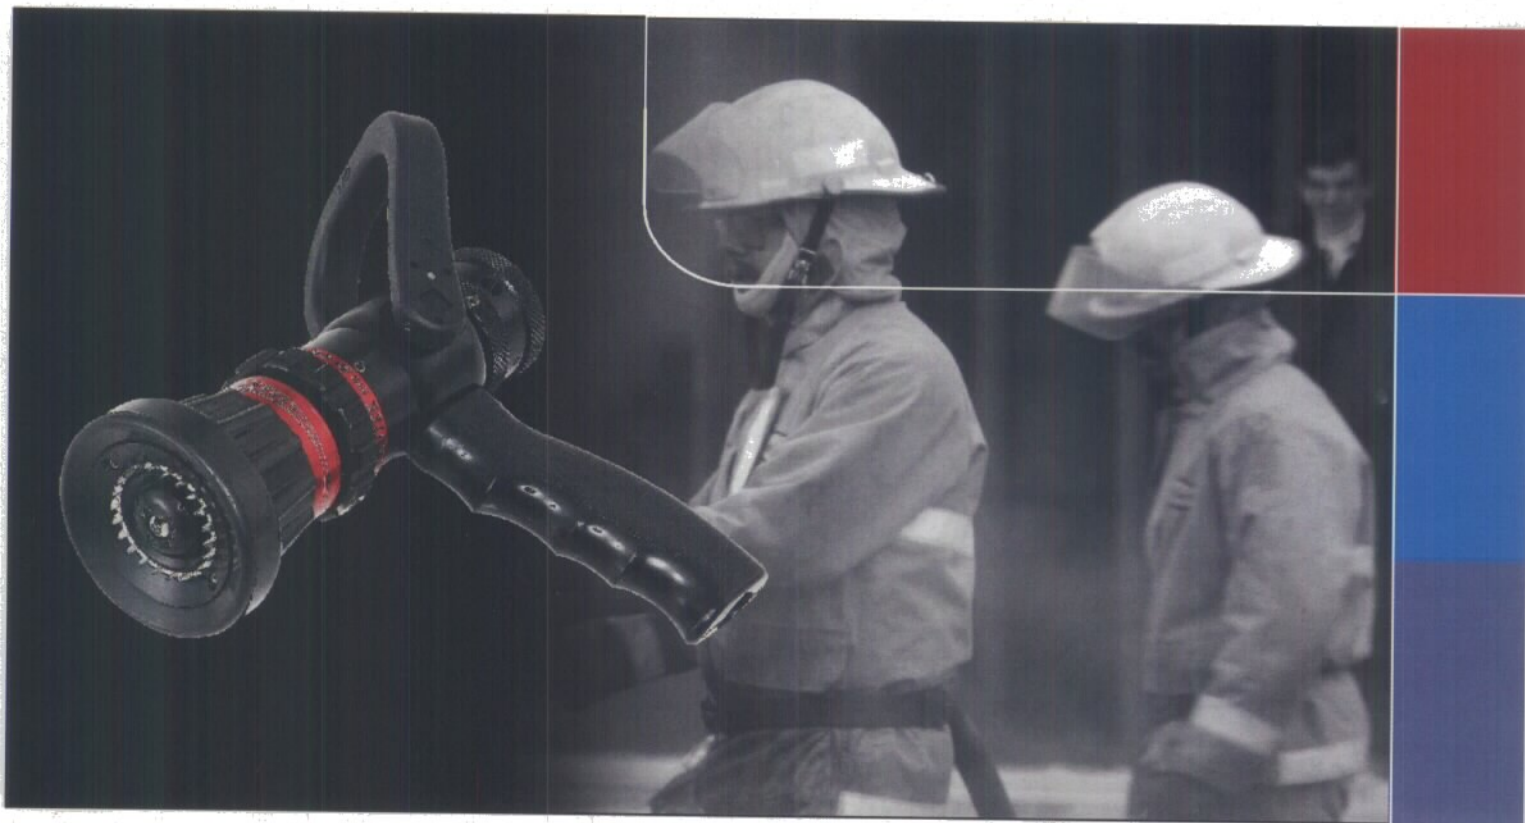

## Style #360,361,362

- Constant flow selectable gallonage nozzle with multi flow settings
- Selected flow remains constant regardless of pattern change
- Multi pattern detents for positive positioning of pattern
- Can be used for high pressure applications up to 580 PSI (40 bar) hydrostatic pressure
- Combination of fog and straight stream
- Superb wide fog pattern for optimum personal protection
- The compact size and reduced weight make it top choice for 1" hose
- Flush without shutting down
- Standard optimum operating pressure 100 PSI (7 bar) Excellence performance at pressure as low as 50 PSI (5 bar)
- Conforms to all aspects of NFPA 1964 (Spray nozzles, shutoff and tips)

**NFPA1964**  
**COMPLIANT**

## Specification

Style	Length	Weight (Lbs)	Flow	
			GPM	LPM
360	1"	7	5-10-24-40	19-37-90-150
361	1"	7	13-25-40-60	50-100-150-230
362	1"	7	12-23-30	50-90-115



# MSC FIRE

**Formerly an OMADA Company**

**After Hours: (01) 2916263**

**Tel: (01) 8465140**

